





Installation Instructions

- 1. Disconnect Battery.** **Do not skip this step.** Also, do not try to “test” the LED array by connecting the leads directly to your battery. Permanent damage will occur to the LED array if you fail to heed these steps. **Handle the LED array by the stainless steel bracket, not by the LEDs or the supporting circuitry.**
2. Remove taillight lens and gasket.
3. Remove tail light bulb.
4. Remove the bulb connector from the back side of the taillight. Cut the two wires close to this connector.
5. Install the provided wire guide into the bulb hole.
6. Route the supplied electrical harness through wire guide to the area where connections will be made. Note that the ground connection (green wire) is made through the LED array’s stainless steel bracket.
7. Align the LED array’s stainless steel bracket, lens gasket, and lens while re-installing the lens screws. Do not overtighten! Note that the stainless bracket must contact the taillight housing.
8. Repeat for the other side.
9. **Wiring.** Using the supplied connectors, connect the wire

from the taillight circuit to the black wire on the supplied harness. To use the connector, strip the wires 1/2” and see the diagram this page. Repeat by connecting the wire from the brake light circuit on your car to the red wire on the supplied harness.

- 10.Repeat for the other side.
- 11.Reconnect the battery.
- 12.Test both STOP and taillight functions.
- 13.Enjoy!

QUICK & EASY!

- ① **Strip wire 1/2"** 
- ② **Twist** 
- ③ **Insert** 
- ④ **Hand tighten** 

Technostalgia

2910 Clifty Drive

Madison Indiana 47250

812-265-0062

e-mail: info@cool-leds.com

WWW.Cool-leds.com

Photo Reference

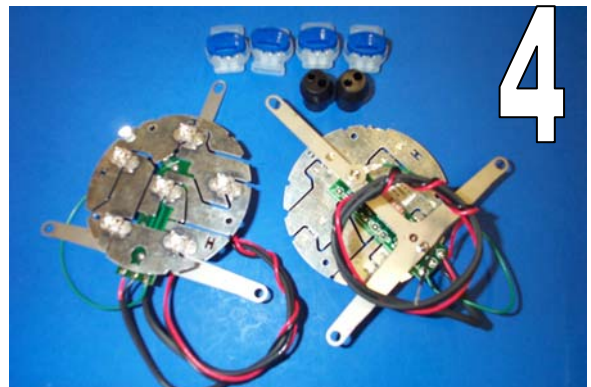


Photo Explanation

1. Remove the old bulb and bulb plastic connector.
2. Install the wire guide and pass the LED wire through the wire guide.
3. The lens gasket is installed **on top** of the LED array bracket.
4. Parts included in the Technostalgia kit.

Technical Notes

1. Turn Signal Flashers: If your car has a conventional bulb in the front parking light, your existing flasher should work. If you have an LED or no front parking light, you will need an electronic flasher. We have these available.
2. If you want to “test” your led array before installation, use a 9 volt transistor radio battery. Touch the green wire to the (-) terminal while touching the red or black wires to the (+) terminal. The LED will not be as bright as normal but you can confirm operation.

Technostalgia

2910 Clifty Drive

Madison Indiana 47250

812-265-0062

e-mail: info@cool-leds.com

WWW.Cool-leds.com