





## *Installation Instructions*


1. **Disconnect Battery.** **Do not skip this step.** Also, do not try to “test” the LED array by connecting the leads directly to your battery. Permanent damage will occur to the LED array if you fail to heed these steps.
2. Remove the lens from the taillight housing.
3. Remove the taillight housing from the car.
4. Remove the bulb socket from the back of the taillight.
5. Take advantage of this time and clean or replace your taillight lenses. A clean, un-cracked lens will magnify your new LED lights.
6. Install the supplied grommet in the old bulb hole.
7. Pass the supplied harness wires through the supplied grommet and old bulb hole (see photo)
8. Cut the wires going to the tail /stop light bulb socket as near to the socket as possible.
9. **Driver’s side Electrical.** Using the supplied connectors, connect the taillight wire on your car to the black wire on the supplied harness. To use the connector: Strip both wires and see the instructions this page. Repeat by connecting the brake light wire on your car to the red wire on the supplied

harness. Attach the supplied green wire to the one of the nuts on the LED bracket.

10. **Passenger side.** Repeat connections on the passenger side.
11. Install the supplied lens gasket on top of the LED bracket.
12. Reinstall taillight lenses/housings in your car. Use the supplied screws for the lens. **DO NOT OVERTIGHTEN!**
13. Reconnect the battery.
14. Test both STOP and taillight functions.
15. Enjoy!
16. **Turnsignals:** If both the tail and stop function both work after installation, but the turnsignals do not, replace the turnsignal flasher with a new one of the same number. **Do not use a “heavy duty” flasher.**

## **QUICK & EASY!**


- ① **Strip wire 1/2"** 
- ② **Twist** 
- ③ **Insert** 
- ④ **Hand tighten** 

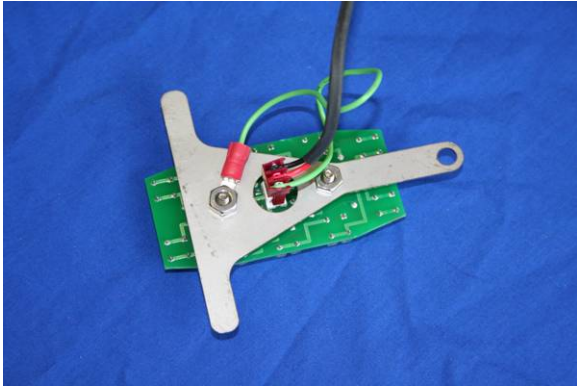


*Attach the supplied harness and ground wire (green) to the LED assembly as shown. Install the supplied rubber grommet in the old bulb hole.*



*Install the LED array into the taillight housing.*

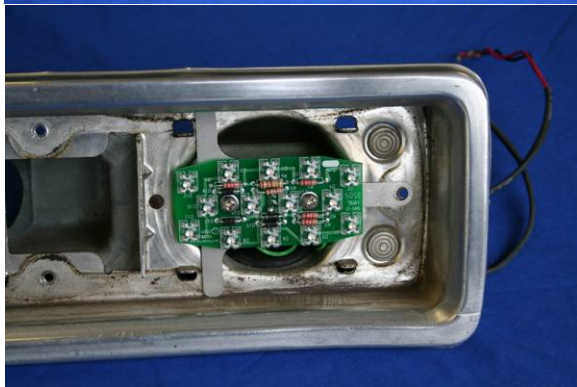

*Install the supplied taillight lens gasket on top of the LED's stainless steel bracket. Install your lens with the supplied screws. **DO NOT OVERTIGHTEN!***

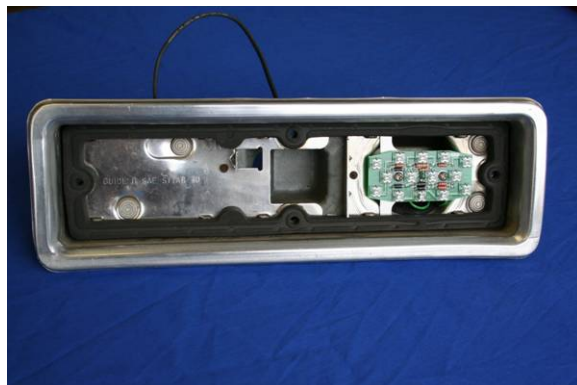

*Parts included in the Technostalgia kit.*



***Technostalgia***

*2910 Clifty Drive*

*Madison Indiana 47250*

*812-265-0062*

*e-mail: [info@cool-leds.com](mailto:info@cool-leds.com)*