





Installation Instructions

1. **Disconnect Battery.** **Do not skip this step.** Also, do not try to “test” the LED array by connecting the leads directly to your battery. Permanent damage will occur to the LED array if you fail to heed these steps.
2. Remove the bulb sockets from underneath the taillight.
3. Remove the taillight assembly from the car.
4. Remove the lens from the taillight assembly.
5. Take advantage of this time and clean or replace your taillight lenses. A clean, un-cracked lens will magnify your new LED lights.
6. Connect the LED array to the supplied harness. The green connector plugs into the back of the LED array.
7. Attach the eye on the green ground wire to one of the two LED mounting screws (see photo).
8. Pass the supplied harness wires through the old bulb socket and position the LED array in the outside bulb housing.
9. Cut the two wires going to the tail /stop light bulb socket as near to the socket as possible.
10. Pass the harness through the supplied wire guide/grommet (see photo).

11. Secure the LED assembly in the housing using the plastic wire guide/grommet (see photo).
12. Attach the green ground wire to the stud coming from the LED array (see photo).
13. Re-install the taillight assembly into the body.
14. Repeat assembly for the other side.
15. **Driver’s side wiring.** Using the supplied connectors, connect the taillight wire on your car (brown wire) to the black wire on the supplied harness. To use the connector:


QUICK & EASY!

- ① Strip wire 1/2" 
- ② Twist 
- ③ Insert 
- ④ Hand tighten 

16. Repeat by connecting the brake light wire (yellow wire) on your car to the red wire on the supplied harness. Last, connect the black wire on the car to the green wire from the LED.
17. **Passenger side wiring.** Repeat connections on the passenger side. The brown wire on the car goes to the black wire on the LED. The dark green wire on the car goes to the red LED wire. Last, connect the black wire on the car to the green wire from the LED.

18. Reconnect the battery.
19. Test both STOP and taillight functions.
20. Enjoy!


Photo Reference:

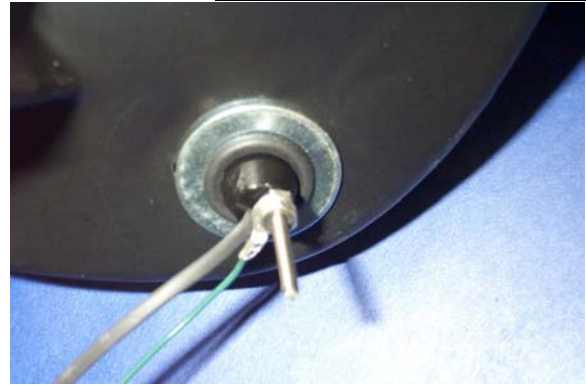


Attach the external grounding wire to the LED mounting stud.



Pass the plastic grommet / wire guide (supplied) over the supplied harness.

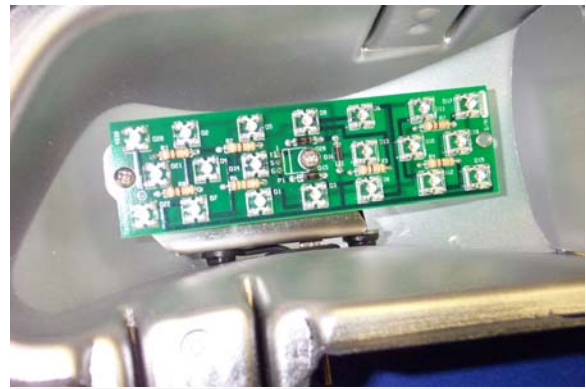

LED assembly properly placed into the taillight housing. Note that the plastic grommet / wire guide is eccentric. By turning this, the LED may be adjusted slightly left or right.

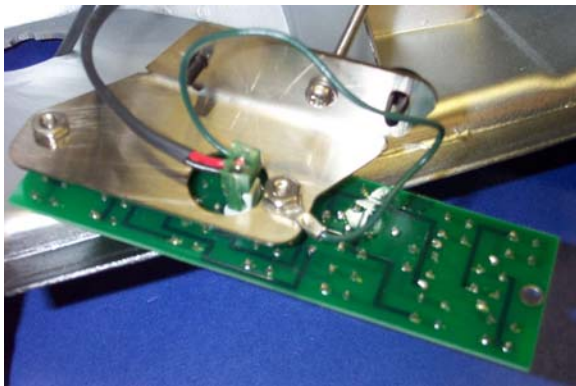

Attach the green ground wire to one of the LED mounting studs, before placing the unit into the taillight housing.

Technostalgia

1889 E Telegraph Hill Rd

Madison Indiana 47250

812-265-0062

e-mail: info@cool-leds.com